SMMS*i* / SHRM*i* VRF Indoor Unit

MMK-AP0093H2UL - High Wall

Model: MMK-AP0093H2UL

TOSHIBA Carrier

Submittal Data

Unit – (s) #: _____

SMMS*i* / SHRM*i* VRF High Wall Features

- R-410A Refrigerant
- Six sizes from 7,000 to 24,000 Btu/h
- Quiet operation, as low as 30 dB(A)
- Vertical airflow can be set to swing of fixed position
- Air throw up to 23 ft, (7 m)
- Auto or manually set three fan speeds
- Easy to remove cleanable filter
- One year parts limited warranty

Refrigerant R-410A

Capacity

Cooling (Btu/h) 9,500

Heating (Btu/h). 10,500

Electrical

Power Source . . . . . .208 / 230V, 1-Phase, 60 Hz

Power Consumption . . . . . 0.021 kW

Full Load Amps . . . . . .0.2 A

Minimum Circuit Amps (MCA) . . . . . 0.3 A

Maximum Over Current Protection (MOCP) . . . . . 15 A

Physical Characteristics

External Finish . . . . . .Munsell 2.5GY9.0/0.5

Dimensions

Inches . . . . . 12 9/16 H x 41 5/16 W x 9.0 D

mm . . . . . .320 H x 1049 W x 228.6 D

Net Weight . . . . . 33 lbs. / 15 kg

Accessories

□ Wired Controller w Timer RBC-AMT32UL

□ 7 Day Prog. Wired Controller RBC-AMS51E-ES

□ Simple Controller RBC-AS21UL

Fan System

Type x Number . . . . . .Cross-flow x 1

Air Flow Rate CFM (L-M-H) . . . . . .230 - 280 - 350

Motor

Type . . . . . .DC Inverter Driven

Watts 30

Sound Pressure Levels

Low-Med-High dB(A) . . . . . .30 - 34 - 39

Refrigerant Piping Connections

Liquid (High Pressure) . . . . . 1/4" / 6.35 mm (Flare)

Gas (Low Pressure). . . . . .3/8" / 9.53 mm (Flare)

Drainpipe Connection

O.D. . . . . 7/8" / 22.2 mm

I.D. . . . . .5/8" / 16 mm

Controls

□ Wireless Remote Controller . . . . . Standard

□ Remote Sensor TCB-TC21LUL

□ Condensate Pump 53DS-900---118

DIMENSIONAL DRAWING - INDOOR UNIT

High Wall

Model: MMK-AP0093H2UL

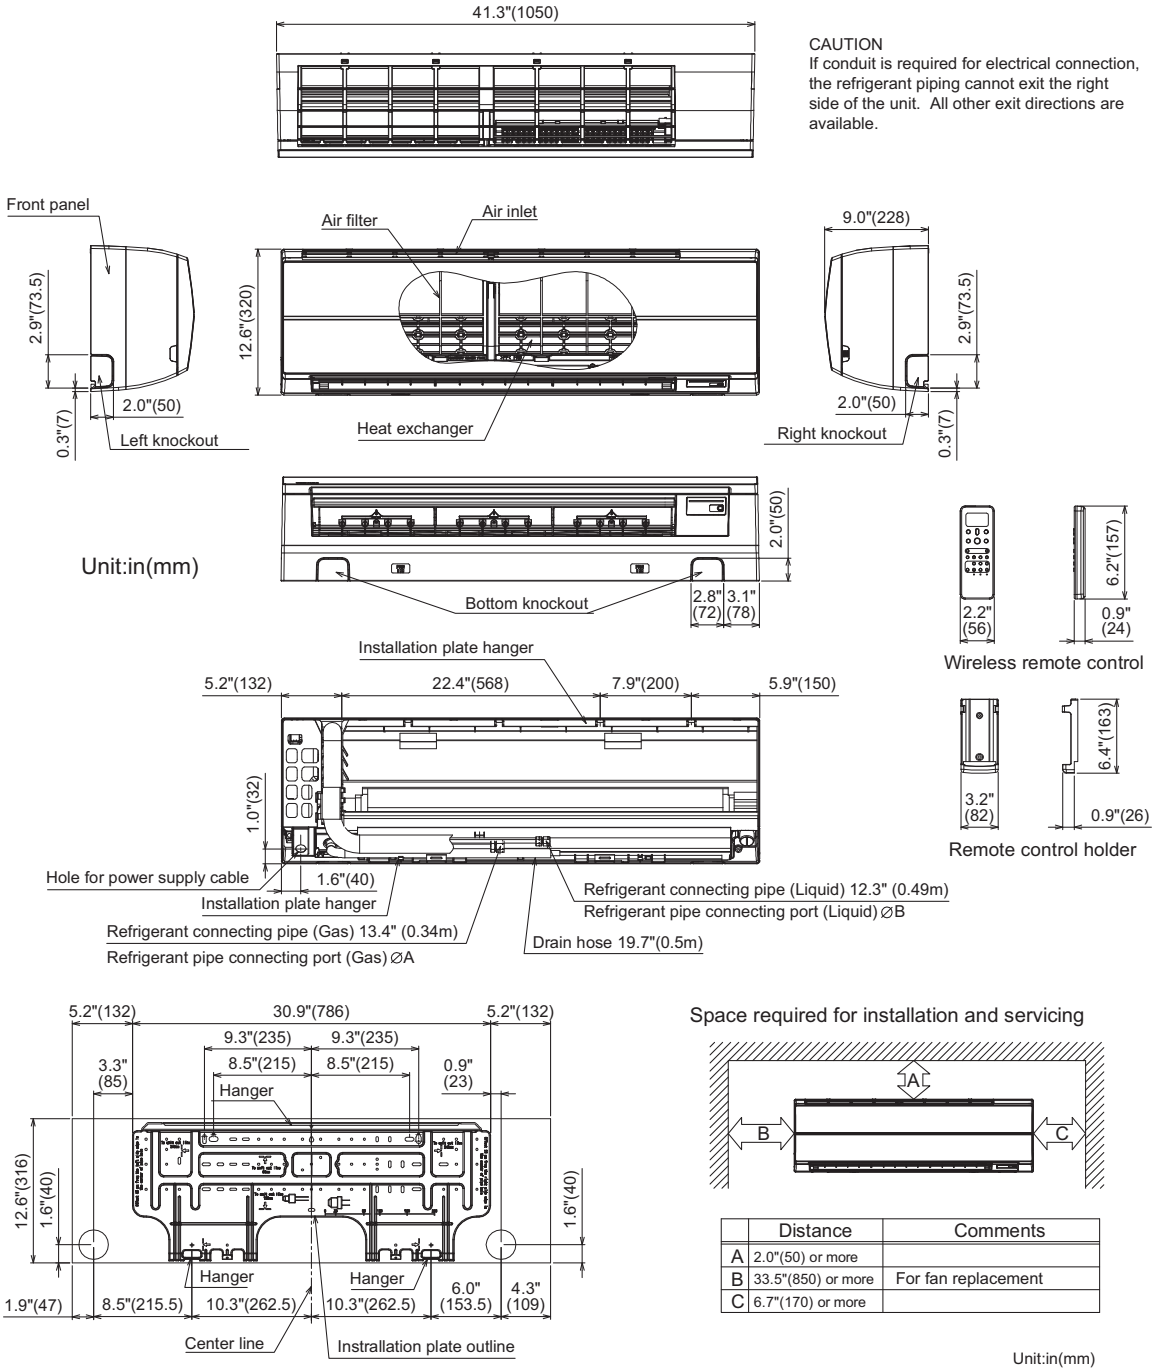

Space required for installation and servicing

	Distance	Comments
A	2.0"(50) or more	
B	33.5"(850) or more	For fan replacement
C	6.7"(170) or more	

Unit:in(mm)

Refrigerant Connection Sizes

Model MMK-	A	B
AP007, 009, 012 Type	3/8" (9.5)	1/4" (6.4)
AP015, 018 Type	1/2" (12.7)	1/4" (6.4)
AP024 Type	5/8" (15.9)	3/8" (9.5)

Copyright 2014 Carrier Corp. ● 7310 W. Morris St. ● Indianapolis, IN 46231

Edition Date: 10/14

Catalog No:SUBMMK0093H2UL – 02

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

Replace: SUBMMK0093H2UL-01